


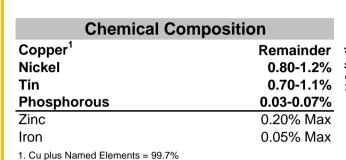

Olin Brass Alloy C19025 has been introduced to meet the needs of the automotive, electronic and electrical markets. This alloy has been licensed by Olin Brass from Dowa Metals. It was developed as Alloy NB109 to meet the increasing requirements of current carrying capacity, stiffness, formability and service temperature survivability demanded by automotive and electronic terminal designers. Should higher electrical conductivity or strengths be required, consider C18080.



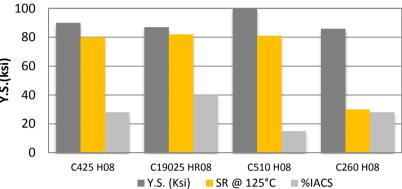


Figure 1: Comparison of Yield Strength , % Stress Remaining @ 3000hrs and Electrical Conductivity performance of various automotive terminal materials.

| Physical Properties | | | | | | |
|--|---|--|--|--|--|--|
| | English Units | Metric Units | | | | |
| Density Thermal Conductivity Electrical Resistivity Electrical Conductivity (annealed) | 0.322 lb/in ³ @ 68°F 100 BTU-ft/ft ² -hr-°F 25.93 ohm circ mils/ft 40% IACS* | 8.91 g/cm ³ 173 W/m ^o K 4.31 microhm-cm 0.232 megamho/cm | | | | |
| Modulus of Elasticity Coeff. Of Thermal Expansion | 18,800,000 psi | 129 kN/mm ² | | | | |
| 68-572°F (20-300°C) *International Annealed Copper Standard | 9.7 PPM/ºF | 17.5 PPM/°C | | | | |

| Mechanical Properties | | | | | | | | |
|-----------------------|------------------|-------------------|-----------------------------|-------------------|---------------------------|---------------------------------|-----|--|
| Temper ¹ | Tensile Strength | | Yield Strength ² | | % Elongation ² | Typical 90° Bend Formability | | |
| | ksi | N/mm ² | ksi | N/mm ² | | GW/BW ³ | | |
| 1/4 Hard | 47-69 | 325-475 | 53 | 365 | 25 | - | - | |
| 1/2 Hard | 63-76 | 435-525 | 66 | 455 | 15 | 0.5 | 0.5 | |
| Hard | 72-83 | 495-570 | 76 | 525 | 10 | 8.0 | 1.0 | |
| Extra Hard | 78-89 | 540-615 | 80 | 550 | 8 | 1.3 | 1.8 | |
| Spring Hard | 84-95 | 580-655 | 87 | 600 | 6 | 2.0 | 2.8 | |
| Extra Spring | 91-106 | 625-730 | 97 | 670 | 4 | | | |

¹ Mechanical properties subject to change. All tempers listed are made to a Tensile Strength specification unless otherwise noted.

² Nominal Values ³ DATA FOR REFERENCE ONLY. R/T = Bend Radius/Material Thickness <0.012" (0.4mm) thick, 11/16 (17.5mm) wide.

| A J OSTER HEADQUARTERS | A J OSTER WOODBURY, CT (Sales) (800) 342-7277 | A J OSTER FOILS | AJ OSTER WEST |
|------------------------|--|-------------------|------------------|
| WARWICK, RI | | ALLIANCE, OH | YORBA LINDA, CA |
| (401) 736-2600 | | (330) 823-1700 | (714) 692-1000 |
| A J OSTER EAST | A J OSTER MIDWEST | AJ OSTER MEXICO | A J OSTER CARIBE |
| WARWICK, RI | CAROL STREAM, IL | QUERETARO, MEXICO | CAGUAS, PR |
| (401) 739-0800 | (630) 260-1040 | 52 (442) 229-4000 | (787) 747-7575 |

COPYRIGHT @2013, GBC METALS, INC. WWW.AJOSTER.COM PRINTED IN U.S.A.